




Dimension



Model	Technical parameters	
GE-SL671B-Y GE-SL671C-Y	Sensing method	Through beam
	Model	NPN GE-SL671B-Y PNP GE-SL671C-Y
Product Features	Output mode	Light-ON+Dark-ON
	Sensing distance	Slot Width: 5mm
•Through beam •Fast Response, High Frequency •IEC IP54	Standard target	> 1.2*0.8mm (Opaque object)
	Light source	940nm infrared light
	Differential	<0.05mm
	Repeat accuracy	<0.01mm
	Supply power	< 5-24V DC±10%
	Residual Voltage	< 1V (Load Current: ≤50mA)
	Curent consumption	<15mA
	Load Current	≤50mA
	Circuit protection	Power reverse indirection connection protection, short-circuit protection, Overload protection
	Response Frequency	> 1kHz
接线方式	Indicator light	Output LED: red
NPN	Connection	Cable 2m
	Ambient temperature	Work:-25℃~+55℃ Store:-30℃~+80℃(No dew condensation or icing allowde)
PNP	Ambient humidity	Work: 5 ~ 85%RH, Store: 5 ~ 95%RH, (No dew condensation)
	Ambient ilumination	Lx Sunlight :10,000, Lx lamplight:3,000Lx
	Anti-vibration	10~55HZ double-amplitude 1.5mmX,Y,Z 2H
	Withstand voltage	1000VAC,50/60Hz 1min between current-caring parts and case
	Insolution resistance	≥ 20 MΩ (500 VDC, terminals to housing)
	Anti-impact	500m/S², X, Y,Z , directions for 3 times
	Protection degree	IEC IP54
	Material Housing	PA+ABS

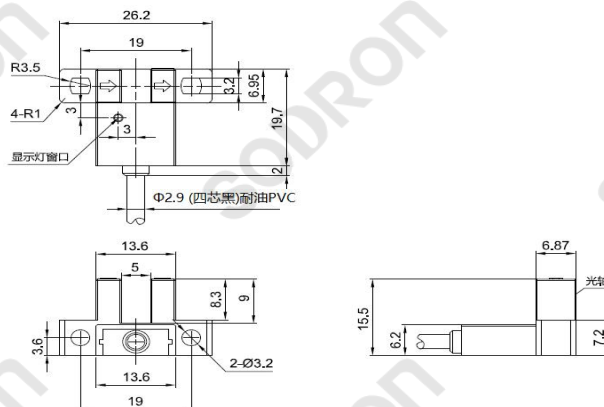