




Dimension

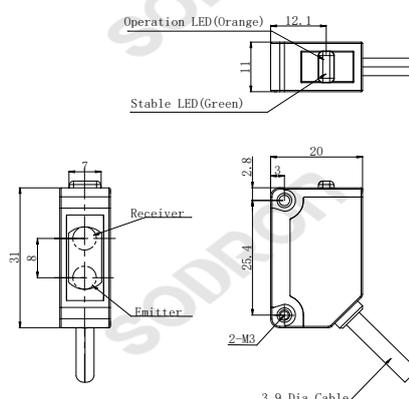

CAD数据

Model

PF31-R04BNOR
PF31-R04BNCR
PF31-R04BPOR
PF31-R04BPCR


Technical parameters

Product Features


- Retro-reflective
- ASIC, Fast Response, High Frequency
- IEC IP67

Connection

NPN

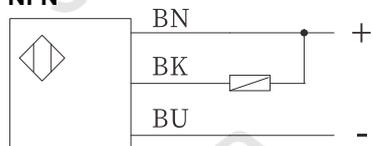

PNP

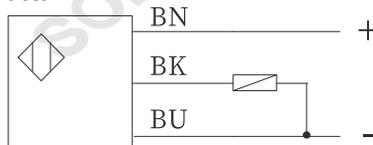

Sensing method		Retro-reflective	
Model	NPN	PF31-R04BNOR	PF31-R04BNCR
	PNP	PF31-R04BPOR	PF31-R04BPCR
Sensing distance	4 m (with a 40 x 60 mm reflector)		
Standard target	> Φ 75mm (Opaque object)		
Output mode	Dark ON		Light ON
Light source	620nm Red LED		
Supply power	DC 12 ~ 24V \pm 10% , impulse (P-P) < 10%		
Directivity Angle	2~10°		
Residual Voltage	< 2V (Load Current: \leq 100mA)		
Current consumption	< 12mA		
Load Current	\leq 100mA		
Circuit protection	Power reverse indirection connection protection, short-circuit protection		
Response time	< 1ms		
Indicator light	Output LED: Orange LED, Power/stable: Green LED		
Connection	Cable 2m		
Ambient temperature	Work: -25 ~ +55°C; Store: -30 ~ +70°C ((No dew condensation or icing allowde)		
Ambient humidity	Work: 35 ~ 85%RH, Store: 35 ~ 95%RH, (No dew condensation)		
Ambient illumination	Sunlight :10,000Lx, lamplight:3,000Lx		
Withstand Voltage	1000 VAC, 50/60 Hz, 1 min.		
Insulation resistance	> 20M Ω (DC500V megger) between current-carrying parts and case		
Anti-vibration	10~55HZ double-amplitude 1.5mmX,Y,Z 2H		
Anti-impact	500m/S ² X, Y,Z , directions for 3 times		
Protection degree	IEC IP67		
Material	Housing	PBT	
	Lens	PMMA	

端子	定义	
1	BN	DC10~30V
2	BU	GND
3	BK	输出

