



## Dimensions

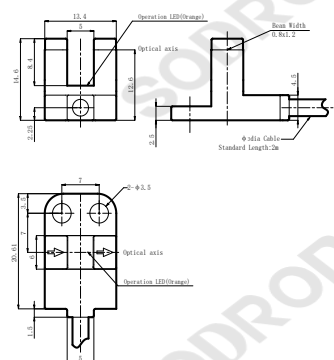

Model	Technical parameters	
	Detection method	Through-beam
PU-Y58 PU-Y58P	Model	NPN PU-Y58 PNP PU-Y58P
	Output mode	Light-ON+Dark-ON
<b>Product Features</b>	Sensing distance	5mm(slot width)
	Standard target	Opaque object of 1.2 × 0.8 mm or larger
	Light source	Infrared emission at 940 nm
	Differential	<0.05mm
	Repeat accuracy	<0.01mm
	Supply power	< 5~24 V DC ±10%
	Residual voltage	< 1 V (Load current ≤ 50 mA)
	Current consumption	<15mA
	Load current	≤50mA
	Circuit protection	Reverse polarity connection, Short circuit protection, overload protection
<b>Connection</b>	Response frequency	≥1kHz
	Indicator light	Action indicator light: Orange LED
	Connection	Cable 2m
	Ambient temperature	Work: -25 ~ +55°C; Storage: -30 ~ +80°C, (No dew condensation or icing allowed)
	Ambient humidity	Work: 5 ~ 85%RH, Storage: 5 ~ 95%RH, No dew condensation
	Ambient illumination	Sunlight: 10,000Lx Lamplight: 3,000Lx
	Anti-vibration	10~55Hz double-amplitude 1.5mmX,Y,Z 2h
	Withstand voltage	1000VAC,50/60Hz 1min between current-carrying parts and case
	Insulation resistance	≥ 20 MΩ (500 VDC, terminals to housings)
	Impact resistance	500 m/s <sup>2</sup> (X, Y, Z directions, 3 times)
<b>Material</b>	Protection degree	IEC IP64
	Housing	PBT
	Display cover	PC

NPN



PNP

