


Dimensions

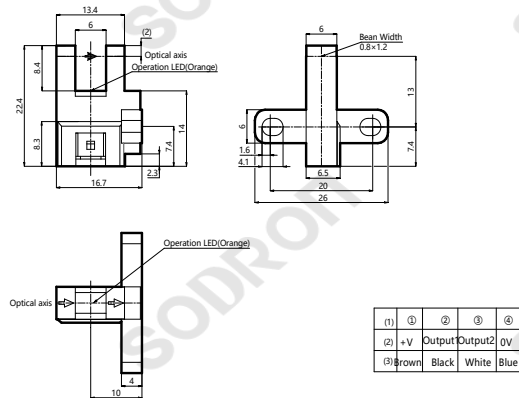

Model	Technical parameters	
PU-T68W PU-T68WP	Detection method	Through beam
	Model	NPN PU-T68W PNP PU-T68WP
Product features <ul style="list-style-type: none"> • Through beam • Fast response, High frequency • IEC IP40 	Output mode	Light-ON+Dark-ON
	Sensing distance	Slot Width: 6mm
Connection <p>NPN</p> <p>PNP</p>	Standard target	> 1.2*0.8mm (Opaque object)
	Light source	940nm infrared light
	Differential	<0.05mm
	Repeat accuracy	<0.01mm
	Supply power	< 5-24V DC±10%
	Residual voltage	< 1V (Load Current: ≤50mA)
	Current consumption	<15mA
	Load current	≤50mA
	Circuit protection	Reverse polarity connection、 Short circuit protection、 overload protection
	Response frequency	> 1kHz
	Indicator light	Output LED: orange LED
	Connection	Connector type
	Ambient temperature	Work:-25°C~+55°C Store:-30°C~+80°C(No dew condensation or icing allowed)
	Ambient humidity	Work: 5~85%RH, Store: 5~95%RH, (No dew condensation)
	Ambient illumination	Sunlight: 10,000Lx Lamplight: 3,000Lx
Anti-vibration	10~55Hz double-amplitude 1.5mmX,Y,Z 2h	
Withstand voltage	1000VAC,50/60Hz 1min between current-carrying parts and case	
Insulation resistance	≥ 20 MΩ (500 VDC, terminals to housings)	
Impact resistance	500 m/s ² (X, Y, Z directions, 3 times)	
Protection degree	IEC IP40	
Material	Housing	PBT
	Display Cover	Polycarbonate (PC)