




Dimensions

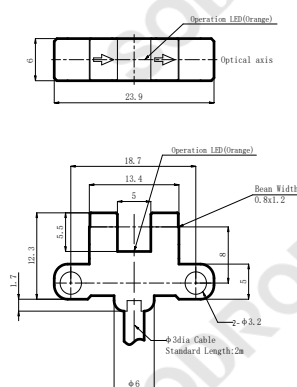

CAD数据

Model	Technical parameters	
	Detection method	Through-beam
PU-K28 PU-K28P	Model	NPN PU-K28 PNP PU-K28P
	Output mode	Light-ON+Dark-ON
Product features <ul style="list-style-type: none"> Through-beam type Fast response and high frequency IEC IP64 	Sensing distance	5mm(slot width)
	Sensing material	Opaque object of 1.2 × 0.8 mm or larger
	Light source	Infrared emission at 940 nm
	Differential	<0.05mm
	Repeat accuracy	<0.01mm
Connection <p>NPN</p> <p>PNP</p>	Supply power	5–24 V DC ±10% or less
	Residual voltage	1 V or less (when the load current ≤ 50 mA)
	Current consumption	<15mA
	Load current	≤50mA
	Circuit protection	Reverse polarity connection, Short circuit protection, Overload protection
	Response frequency	≥1kHz
	Indicator light	Action indicator light: Orange LED
	Connection	Cable 2m
	Ambient Temperature	Work: -25 ~ +55°C; Storage: -30 ~ +80°C, No dew condensation or icing allowed
	Ambient humidity	Work: 5 ~ 85%RH, Storage: 5 ~ 95%RH, No dew condensation
Ambient illumination	Sunlight: 10,000Lx Lamplight: 3,000Lx	
Anti-vibration	10~55Hz double-amplitude 1.5mmX,Y,Z 2h	
Withstand voltage	1000VAC,50/60Hz 1min between current-carrying parts and case	
Insulation resistance	≥ 20 MΩ (500 VDC, terminals to housings)	
Impact resistance	500 m/s ² (X, Y, Z directions, 3 times)	
Protection degree	IEC IP64	
Material	Housing	PBT
	Display cover	PC