




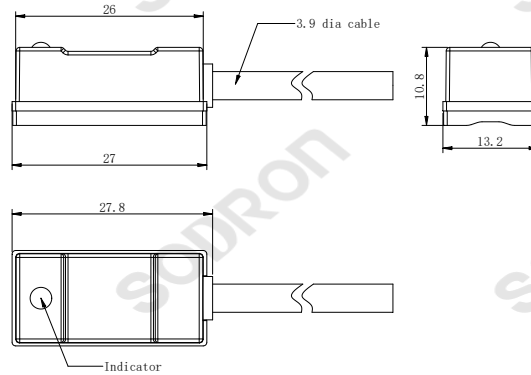
CE

Model

BT21-05AA

Product Features

- Contact magnetic induction
- IEC IP67

Connection**Two-wire—NO****Dimension****Technical parameters**

Wiring method	Two-wire type
Switch logic	SPST NO
Output contact	Contact type
Power supply voltage	5~240 V DC/AC
switching current	100mA max
Contact capacity	10W max
Internal voltage drop	3.5V max
Indicator light	Green LED
Cable	Φ3.9mm (2-core), Grey, 0.22mm ² , PVC
Switching frequency	200Hz max
Induced magnetic field	80Gs
Temperature	Work: -10~70°C
Anti-impact	30G (Sine wave / X, Y, Z 3 axes / 3 times per axis / 11 ms per time)
Anti-vibration	9Gs(Double amplitude 1.5 mm / 10 Hz~55 Hz~10 Hz sweep), duration 1 min per cycle; 1 hour for each X, Y, Z axis.
Protection degree	IEC IP67
Circuit protection	/